


STAGE 4

LILLIAN WAY

SS4

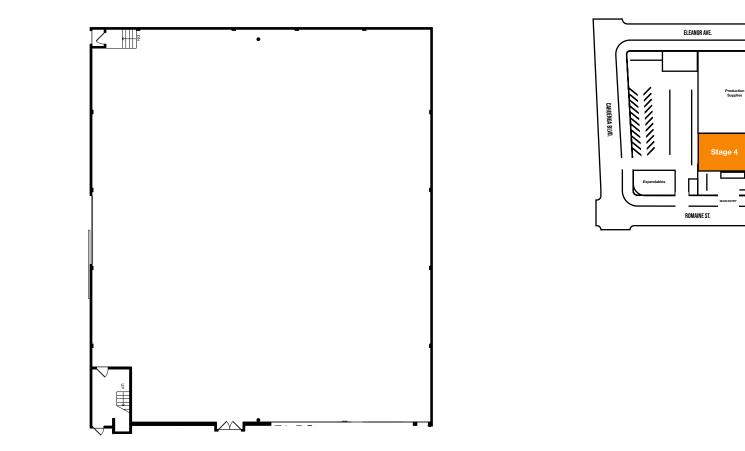

| WIDTH | LENGTH | HEIGHT (PERMS) | TOTAL STAGE Square footage | FLOOR TYPE | DOOR (WxH) |
|---------|--------|----------------|-------------------------------|------------|------------|
| 104'7'' | 90'2" | 18' | 9,845 | CEMENT | 10' X 17' |

*Dimensions are for overall stage size and do not take into account stage irregularities. Production company representative should verify dimensions for particular applications.

ϘUΙΧΟΤΕ

By Sunset Studios

STAGE SPECIFICATION - STAGE 4

| STAGE SPECIFICATIONS | HVAC | |
|--------------------------------|---|--|
| Width - 104'7'' | HVAC - Fully Self Contained (40 ton cooling capacity) | |
| Length - 90'2'' | Redlight Control - No | |
| Height - 18' | Flex Duct Connection - No | |
| Fire Lane - 4' | Exhaust Fans - Yes | |
| Total Square Footage - 9,845 | | |
| Elephant Door - 10' x 17' | STAGE EXTRAS | |
| Occupancy Load - 250 | Bell & Light System - Yes | |
| | Ramp Loading - Yes | |
| POWER | Motorized Elephant Door - Yes | |
| Power/Amps - 120-208V / 1,200A | Pipe Grid PSF - 6 | |
| Disconnects Per Stage - 1 | Water Available Outside - Yes | |
| | # of Parking Spaces - 20 | |

*Dimensions are for overall stage size and do not take into account stage irregularities. Production company representative should verify dimensions for particular applications.